



iPad 2 GSM LCD Replacement

Removing LCD assembly with front panel attached. Internal Prerequisite.


Written By: Walter Galan



INTRODUCTION


Removing LCD assembly with front panel attached. Internal Prerequisite.

Step 1 — LCD

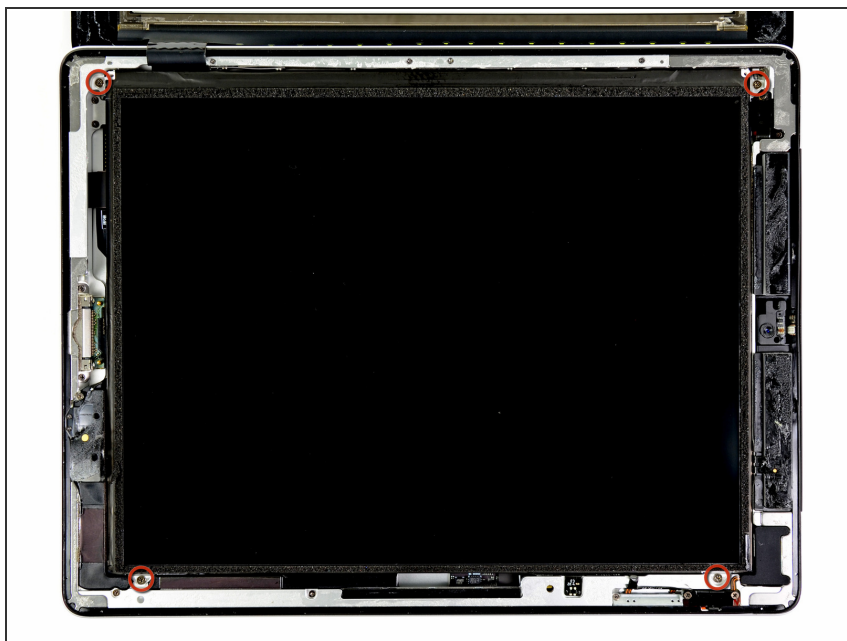


- Remove the four 2.0 mm Phillips screws securing the LCD to the rear case.

Step 2

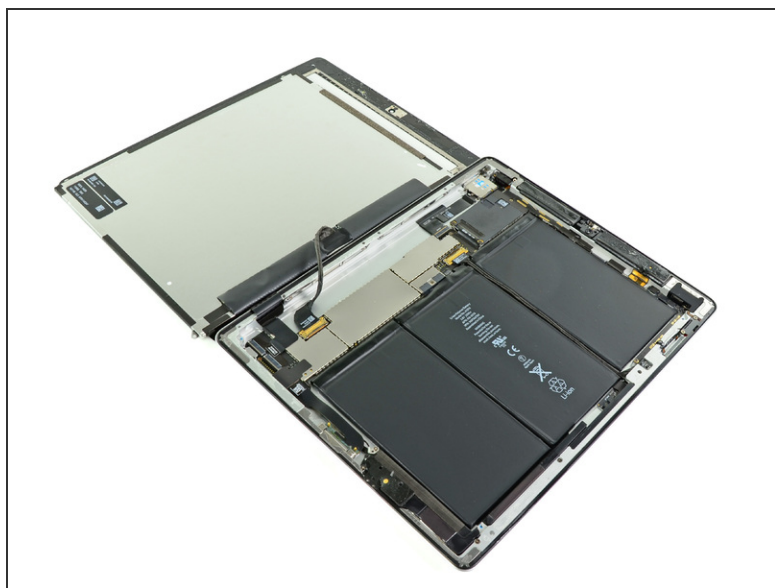

- Lift the LCD from its long edge closest to the volume buttons and rotate it out of the rear case.
- Lay the LCD on the front panel as seen in the second picture.

Step 3

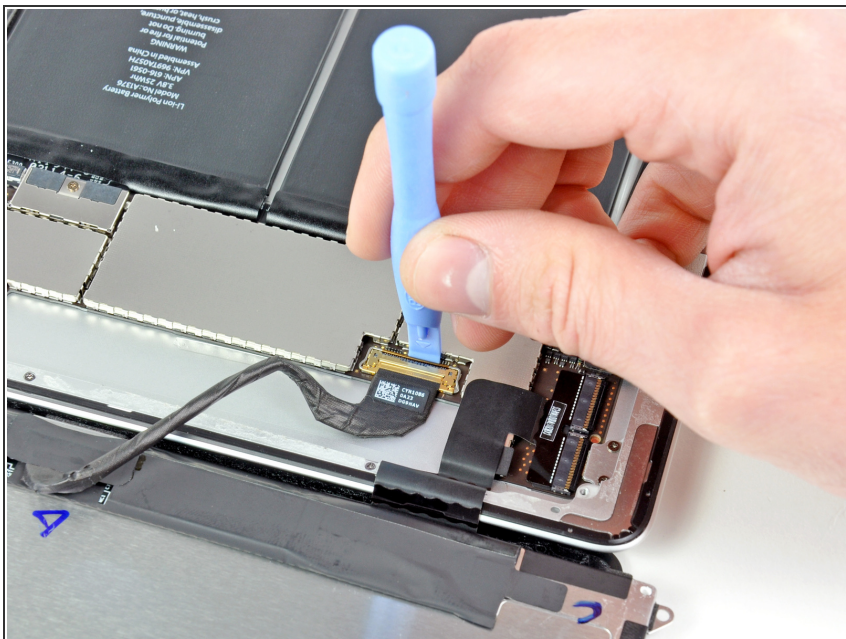


- Use the edge of a plastic opening tool to flip up the metal retaining clip securing the display data cable to its socket on the logic board.

Step 4



- Pull the display data cable out of its socket on the logic board.

 Do not lift upward on the display data cable connector as you disconnect it.

Step 5



- Remove the LCD assembly from the iPad 2.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-01 08:01:27 AM.